



COMMON PRE-BOARD EXAMINATION

PHYSICS-Code No. 042

Class-XII-(2025-26)

SET: 3 MARKING SCHEME



Time allowed: 3 Hrs.

Maximum Marks: 70


SECTION A		
1.	(C) C ∴ Deflection of charged particle in time t in y -direction $h = 0 \times t + \frac{1}{2}at^2 = \frac{1}{2} \frac{qE}{m} t^2$ i.e. $h \propto q/m$ As the particle C suffers maximum deflection in y -direction, so it has highest charge to mass q/m ratio.	1
2.	(B) $v/2$ Given initial drift velocity $(v_{d1}) = v$; initial current $(I_1) = I$, initial radius $(r_1) = r$, final radius $(r_2) = 2r$ and final current $(I_2) = 2I$. The drift velocity is given by $v_d = \frac{I}{neA} = \frac{I}{ne \times \pi r^2}$ i.e., $v_d \propto \frac{I}{r^2}$ Therefore, $\frac{v_{d1}}{v_{d2}} = \frac{I_1}{I_2} \times \frac{r_2^2}{r_1^2} = \frac{I}{2I} \times \frac{(2r)^2}{r^2} = 2$ ∴ $v_{d2} = \frac{v_{d1}}{2} = \frac{v}{2}$	1
3.	(A) $ef\pi r^2$ Magnetic moment of the electron revolving round the nucleus, $m = IA$ Here, I = current produced due to moving electron and A = area of the orbit Now, $m = I \cdot A$ $m = (e/t) \pi r^2 = ef\pi r^2$	1
4.	(C) Move towards the wire or towards Left.	1

	<p>The long straight wire and side AB carry current in the same direction, hence will attract each other.</p> <p>The long straight wire and side CD carry current in the opposite direction, hence will repel each other.</p> <p>Force on side BC will be equal and opposite to force on side DA.</p> <p>Since CD is farther from the wire than AB, the force of attraction on AB will exceed the force of repulsion on CD.</p> <p>Hence, there will be a net force of attraction on the loop ABCD and it will move towards the wire.</p>	
5.	(B) (i) bcdab; (ii) bacb	1
6.	<p>(D) an iron rod is inserted in the coil.</p> <p>Explanation:</p> <p>Impedance is given as, $Z = \frac{\sqrt{R^2 + X_L^2}}{R^2 + (L \times 2\pi f)^2}$</p> <p>$\therefore$ Impedance lowers as frequency falls. Self inductance and consequently impedance decrease as the number of turns decreases. $X_C = X_L$ at resonance, and impedance falls. Impedance rises when an iron rod is introduced. As a result, the current diminishes. As a result, option (D) is correct.</p>	1
7.	<p>(A) 100 mH</p> <p>In series LCR, current is maximum at resonance.</p> <p>\therefore Resonant frequency $\omega = \frac{1}{\sqrt{LC}}$</p> <p>$\therefore \omega^2 = \frac{1}{LC}$ or, $L = \frac{1}{\omega^2 C}$</p> <p>Given $\omega = 1000 \text{ s}^{-1}$ and $C = 10 \mu\text{F}$</p> <p>$\therefore L = \frac{1}{1000 \times 1000 \times 10 \times 10^{-6}} = 0.1 \text{ H} = 100 \text{ mH}.$</p>	1
8.	(B) $\frac{1}{\sqrt{\mu\epsilon}}$	1
9.	(A) yellow, orange, red	1

	<p>We know that; $\sin c = \frac{1}{\mu}$</p> <p>or $c = \sin^{-1}\left(\frac{1}{\mu}\right)$</p> <p>$\therefore$ as μ decreases with increase in λ.</p> <p>Yellow, orange and red have higher wavelength's than green, thus μ is less for these rays.</p> <p>If μ is less, then critical angle for these rays will be high.</p> <p>Thus if green is totally internally reflected just, then yellow, orange and red emerge out.</p>	
10.	<p>(B) 25:1</p> <p>The amplitudes of interfering beams are in the ratio 2:3. \therefore The ratio of I_{\max} to I_{\min}</p> <p>i.e., $\frac{I_{\max}}{I_{\min}} = \frac{(a_1 + a_2)^2}{(a_1 - a_2)^2} = \frac{5^2}{1} = 25$.</p>	1
11.	<p>(D) reduce to $(1/4)^{\text{th}}$ of the original value</p> <p>When v is doubled, kinetic energy increases to 4 times the values. Since $r_0 = \frac{2Ze^2}{4\pi\epsilon_0 E_k}$</p> <p>$r_0$ reduces to $\left(\frac{1}{4}\right)$ times the initial value.</p>	1
12.	<p>(A) $(BE)_n > (BE)_p$</p> <p>Reason: A neutron is acted upon only by attractive nuclear forces, whereas a proton is acted upon in addition by repulsive electric forces that decreases its binding energy. Hence, removing a proton is easier.</p>	1
13.	<p>(C) Assertion is true but Reason is false.</p>	1
14.	<p>(B) Both Assertion and Reason are true but Reason is not the correct explanation of Assertion.</p> <p>$\mu = \frac{\mu_g}{\mu_c} = \frac{1.5}{1.65} < 1$</p> <p>As $\frac{1}{f} = (\mu - 1)\left(\frac{1}{R_1} - \frac{1}{R_2}\right)$</p> <p>$\therefore f$ becomes negative.</p> <p>Therefore, the lens behaves as a diverging lens.</p>	1
15.	<p>(A) Both Assertion and Reason are true and Reason is the correct explanation of Assertion.</p> <p>Reason:</p> <p>For diffraction to occur, the size of an obstacle/ aperture is comparable to the wavelength of light wave. The order of wavelength of light wave is 10^{-7} m. so diffraction occurs.</p>	1
16.	<p>(A) Both Assertion and Reason are true and Reason is the correct explanation of Assertion.</p>	1

SECTION B

17. Since the electric field has only x component, for faces normal to x direction, the angle between E and ΔS is $\pm \pi/2$. Therefore, the flux is separately zero for each face of the cube except the two shaded ones.



The magnitude of the electric field at the left face is $E_L = 0$ (As $x = 0$ at the left face)

The magnitude of the electric field at the right face is $E_R = 2a$

(As $x = a$ at the right face)

The corresponding fluxes are

$$\phi_L = \vec{E} \cdot \Delta \vec{S} = 0$$

$$\phi_R = \vec{E}_R \cdot \Delta \vec{S}$$

$$= E_R \Delta S \cos \theta$$

$$= E_R \Delta S \quad (\because \theta = 0^\circ)$$

$$\Rightarrow \phi_R = E_R a^2 \text{ Net flux } (\phi) \text{ through the cube} = \phi_L + \phi_R = 0 + E_R a^2 = E_R a^2$$

$$\phi = 2a(a)^2 = 2a^3$$

We can use Gauss's law to find the total charge q inside the cube.

$$\phi = \frac{q}{\epsilon_0}$$

$$q = \phi \epsilon_0 = 2a^3 \epsilon_0$$

18. We know that, $R(t) = R_0[1 + \alpha(T - T_0)]$

$$R(T) = 1.2 \Omega, R_0 = 1.0 \Omega ; \alpha = 3.8 \times 10^{-3}/^\circ\text{C}, T = 20^\circ\text{C}$$

$$\therefore 1.2 = 1.0 [1 + 3.8 \times 10^{-3} (T - 20)]$$

Solving this we get, $T = 72.6^\circ\text{C}$


19. (I)

Magnetic field at center of loop P having radius = 5 cm and current 3A

$$B_P = \frac{\mu_0 I}{2r} = \frac{\mu_0 \times 3}{2(5 \times 10^{-2})} \text{ Tesla}$$

Similarly,

$$B_Q = \frac{\mu_0 \times 4}{2(5 \times 10^{-2})} \text{ Tesla}$$



Both the fields are perpendicular to each other

$$\begin{aligned} \therefore B_{\text{net}} &= \sqrt{B_P^2 + B_Q^2} \\ &= \sqrt{\left(\frac{\mu_0 \times 3}{2(5 \times 10^{-2})}\right)^2 + \left(\frac{\mu_0 \times 4}{2(5 \times 10^{-2})}\right)^2} \\ &= \frac{\mu_0}{2 \times 5 \times 10^{-2}} \sqrt{3^2 + 4^2} \\ &= \frac{4\pi \times 10^{-7}}{2 \times 5 \times 10^{-2}} \times 5 \\ &= 2\pi \times 10^{-5} \text{ Tesla} \end{aligned}$$

Also, $\tan \theta = \frac{B_P}{B_Q} = \frac{3}{4}$

$\Rightarrow \theta = \tan^{-1} \frac{3}{4}$

OR

(II)

(A) (i) X is diamagnetic and Y is ferromagnetic.

(B) Diamagnetic materials have permeabilities less than 1 (one) and have negative susceptibility.

Their atoms and molecules do not have permanent dipole moment. The field lines get expelled in them.

Ferromagnetic materials have permeability more than one and susceptibility positive. Their atoms and molecules have permanent dipole moment. So, the field lines get concentrated in them.

20. (I)

1/2

1/2

1/2

1/2

1/2 + 1/2

1/2

1/2

$$\lambda = \frac{c}{\nu}$$

$$= \frac{3 \times 10^8}{2 \times 10^{10}}$$

$$= 0.015 \text{ m}$$

(II)

$$B_0 = \frac{E_0}{c}$$

$$= \frac{48}{3 \times 10^8}$$

$$= 1.6 \times 10^{-7} \text{ T}$$

1

1

21. (I) According to Einstein's Photoelectric equation

$$\frac{hc}{\lambda} - \phi_0 = K_{\max}$$

$$\text{So, } V_0 = \frac{hc}{e\lambda} - \frac{\phi_0}{e}$$

Graph of V_0 vs $\frac{1}{\lambda}$ is a straight line having slope $\frac{hc}{e}$, which is independent of material.

$$\text{So, } \tan\theta = \frac{hc}{e}$$

$\Rightarrow h = \frac{e \tan\theta}{c}$ can be determined from the graph.

OR

(II)

Change in energy

$$= -1.51 + 3.4$$

$$= 1.89 \text{ eV}$$

$$\therefore \Delta E = \frac{hc}{\lambda}$$

$$\lambda = \frac{hc}{\Delta E} = \frac{12400}{1.89} \text{ \AA} = 6560 \text{ \AA}$$

1

½

½

1

$$\text{for } n = 2, \quad E_2 = \frac{-13.6}{(2)^2} = -3.4 \text{ eV}$$

$$\text{for } n = 3, \quad E_3 = \frac{-13.6}{(3)^2} = -1.51 \text{ eV}$$

for transition from 3rd orbit to 2rd orbit, the series is Balmer.

1

22. (I) (A) The kinetic energy (K) a particle gains when accelerated through a potential difference (V) is equal to the work done on it by the electric field, which is the product of its charge (q) and the potential difference. $\Rightarrow K=qV$

The charges of the particles are:

- Proton: $q_p = +e$
- Deuteron: $q_d = +e$
- Alpha particle: $q_\alpha = +2e$

Since they are all accelerated through the same potential difference V , their kinetic energies will be:

- Proton: $K_p = eV$
- Deuteron: $K_d = eV$
- Alpha particle: $K_\alpha = 2eV$

Therefore, the kinetic energies of the proton and deuteron are equal, and the kinetic energy of the alpha particle is twice that of the proton or deuteron.

$$K_p = K_d$$

$$K_\alpha = 2K_p = 2K_d$$

(B)

The radius r of the circular path in a magnetic field is given by:

$$r = \frac{mv}{qB}$$

where v is the velocity of the particle.

1/2

1

From the kinetic energy formula:

$$KE = \frac{1}{2}mv^2 \implies v = \sqrt{\frac{2KE}{m}} \implies r = \frac{m\sqrt{\frac{2KE}{m}}}{qB} = \frac{\sqrt{2mKE}}{qB}$$

Using the kinetic energy ratios:

- For the proton:

$$r_p = \frac{\sqrt{2m \cdot eV}}{eB}$$

- For the deuteron:

$$r_d = \frac{\sqrt{2(2m) \cdot eV}}{eB} = \frac{\sqrt{4m \cdot eV}}{eB} = 2r_p$$

- For the alpha particle:

$$r_\alpha = \frac{\sqrt{2(4m) \cdot 2eV}}{2eB} = 2\sqrt{2}r_p$$

Given that the radius of the proton's path $r_p = 5$ cm, we can find the radii of the deuteron and alpha particle:

1. For the deuteron:

$$r_d = 2r_p = 2 \times 5 \text{ cm} = 10 \text{ cm}$$

2. For the alpha particle:

$$r_\alpha = 2\sqrt{2}r_p = 2\sqrt{2} \times 5 \text{ cm} \approx 14.14 \text{ cm}$$

OR

(II) (A)

(i) For $\theta = 0^\circ$ between \vec{M} and \vec{B} , dipole is in stable equilibrium.

(ii) For $\theta = 180^\circ$ between \vec{M} and \vec{B} , dipole is in unstable equilibrium.

(B)

Potential energy, $U = -\vec{M} \cdot \vec{B}$

At $\theta = 0^\circ$, $U_i = -MB \cos 0^\circ = -MB$

$$= -0.30 \times 0.50 = -0.15 \text{ J}$$

At $\theta = 180^\circ$, $U_f = -MB \cos 180^\circ = MB = +0.15 \text{ J}$

(C)


½

½

½

½ + ½


½ + ½

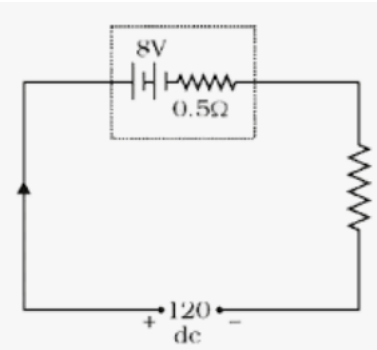	<p>Torque on magnet is $\tau = MB \sin\theta$ At $\theta = 0^\circ$, $\tau = MB \sin 0^\circ = 0$ At $\theta = 180^\circ$, $\tau = MB \sin 180^\circ = 0$</p>	$\frac{1}{2} + \frac{1}{2}$
23.	<p>(I)</p>  <p>(II)</p> <p>Effective voltage, $E_{\text{eff}} = 120 - 8 = 112 \text{ V}$</p> <p>Equivalent resistance, $R_{\text{eq}} = r + R = 0.5 + 15.5 = 16 \Omega$</p> <p>$\therefore I = \frac{E_{\text{eff}}}{R_{\text{eq}}} = \frac{112}{16} = 7 \text{ A}$</p> <p>$\therefore$ Terminal voltage of battery during charging,</p> <p>$V = E + Ir$</p> <p>$= 8 + 7 \times 0.5$</p> <p>$= 11.5 \text{ V}$</p> <p>(III)</p> <p>Series resistance controls the current drawn from external supply. In its absence, the current during the charging will be dangerously high.</p>	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$
24.	<p>(I)</p> <p>The two necessary conditions for total internal reflection are:</p> <ol style="list-style-type: none"> i. The light must travel from a denser medium to a rarer medium. ii. The angle of incidence must be greater than the critical angle for the pair of media. <p>(II)</p> <p>Critical angle for ray '1': $\mu_1 = \frac{1}{\sin C_1}$</p>	1 $\frac{1}{2}$

$$\sin C_1 = \frac{1}{\mu_1} = \frac{1}{1.33} = 0.75 \Rightarrow C_1 \approx 48^\circ$$

Critical angle for ray '2': $\mu_2 = \frac{1}{\sin C_2}$

$$\sin C_2 = \frac{1}{\mu_2} = \frac{1}{1.45} = 0.69 \Rightarrow C_2 \approx 43^\circ$$

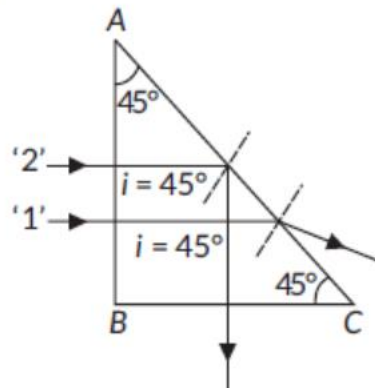

Both the rays will fall on the side AC with angle of incidence, i equal to 45° . Critical angle of ray '1' is greater than i . Hence, it will emerge from the prism as shown in the figure.

Critical angle of ray '2' is less than i . Hence, it will be internally reflected as shown in the figure.


25. AB: Incident Plane Wave Front and CE is Refracted Wave Front.

$$\sin i = \frac{BC}{AC} \text{ and } \sin r = \frac{AE}{AC}$$

$$\frac{\sin i}{\sin r} = \frac{BC}{AE} = \frac{v_1}{v_2} = \text{constant}$$

$$\frac{v_1}{v_2} = \frac{\mu_2}{\mu_1} = \frac{\sin i}{\sin r}$$

$\mu_2 \sin r = \mu_1 \sin i$. This proves the Snell's law of refraction.

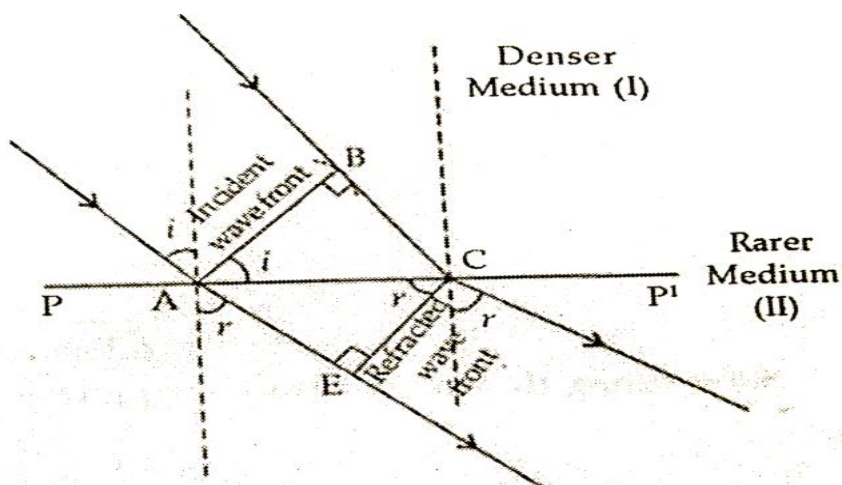

26. (I) Any 2

NUCLEAR FISSION	NUCLEAR FUSION
A heavy nucleus breaks up to form two lighter nuclei.	Two light nuclei combine to form a heavy nucleus.
It involves a chain reaction.	Chain reaction is not involved.
The heavy nucleus is bombarded with neutrons.	Light nuclei are heated to an extremely high temperature.
We have proper mechanisms to control fission reaction for generating electricity.	Proper mechanisms to control fusion reaction are yet to be developed.
Disposal of nuclear waste is a great environmental problem.	Disposal of nuclear waste is not involved.
Raw material is not easily available and is costly.	Raw material is comparatively cheap and easily available.

(II)

Given : $m = 100 \text{ g}$, $P = 500 \text{ W}$

Here two deuterium nuclei produce 3.27 MeV energy

$$= 5.232 \times 10^{-13} \text{ J}$$

$$\therefore \text{Energy per nuclei} = \frac{5.232 \times 10^{-13}}{2}$$

$$= 2.616 \times 10^{-13} \text{ J}$$

No. of deuterium atoms in 100 g

$$= \frac{6.023 \times 10^{23} \times 100}{2} = 3.011 \times 10^{25} \text{ atoms}$$

$$\therefore \text{Total energy} = 3.011 \times 10^{25} \times 2.616 \times 10^{-13}$$

$$= 7.88 \times 10^{12} \text{ J}$$


$$\text{Power} = \frac{\text{Energy}}{\text{Time}} \Rightarrow t = \frac{7.88 \times 10^{12}}{500} = 1.58 \times 10^{10} \text{ s}$$

$$= \frac{1.58 \times 10^{10}}{365 \times 24 \times 60 \times 60} = 500 \text{ years}$$

1

1

27. (I)

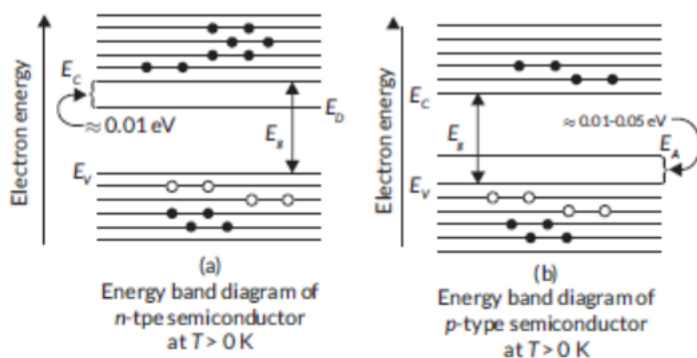


1+1

(II)

In *n*-type extrinsic semiconductors, the number of free electrons in conduction band is much more than the number of holes in valence band. The donor energy level lies just below the conduction band.

1

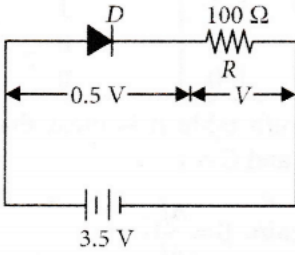	<p>In <i>p</i>-type extrinsic semiconductor, the number of holes in valence band is much more than the number of free electrons in conduction band. The acceptor energy level lies just above the valence band.</p>	
28.	<p>(I)</p> <ul style="list-style-type: none"> Resistance $R = 10 \Omega$ Area $A = 10 \text{ cm}^2 = 10 \times 10^{-4} = 1 \times 10^{-3} \text{ m}^2$ A current-time graph showing a linear decrease in current from $I = 0.4 \text{ A}$ to 0 A over $t = 1 \text{ s}$ <p>Total charge passed through the loop:</p> $Q = \text{Area under } I\text{-}t \text{ graph} = \frac{1}{2} \times \text{base} \times \text{height} = \frac{1}{2} \times 1 \times 0.4 = \boxed{0.2 \text{ C}}$ <p>(II) Change in magnetic flux</p> $\text{Induced emf } e = \frac{\Delta\Phi}{\Delta t}$ <p>Also, $e = IR$</p> <p>We can use average current $I_{\text{avg}} = 0.2 \text{ A}$, over $\Delta t = 1 \text{ s}$</p> $e = I_{\text{avg}} \cdot R = 0.2 \times 10 = 2 \text{ V}$ $\Delta\Phi = e \cdot \Delta t = 2 \cdot 1 = \boxed{2 \text{ Wb}}$ <p>(III) magnitude of the field applied</p> $\Delta\Phi = B \cdot A \Rightarrow B = \frac{\Delta\Phi}{A} = \frac{2}{1 \times 10^{-3}} = \boxed{2000 \text{ T}}$	<p>1</p> <p>1</p> <p>1</p>
SECTION D		
29.	<p>(I) (C) 30 mA</p>  <p>The potential difference across the resistance R is</p> $V = 3.5 \text{ V} - 0.5 \text{ V} = 3 \text{ V}$ <p>By Ohm's law,</p> <p>The current in the circuit is</p> $I = \frac{V}{R} = \frac{3 \text{ V}}{100 \Omega} = 3 \times 10^{-2} \text{ A}$ $= 30 \times 10^{-3} \text{ A} = 30 \text{ mA}$ <p>(II) (D) 10^{-6}</p>	1

- (a) From the curve, at $I = 20 \text{ mA}$, $V = 0.8 \text{ V}$; $I = 10 \text{ mA}$, $V = 0.7 \text{ V}$
 $r_{fb} = \Delta V / \Delta I = 0.1 \text{ V} / 10 \text{ mA} = 10 \Omega$
- (b) From the curve at $V = -10 \text{ V}$, $I = -1 \mu\text{A}$,
 Therefore,
 $r_{rb} = 10 \text{ V} / 1 \mu\text{A} = 1.0 \times 10^7 \Omega$

(III) (B) 2.3 V

Let V be the potential difference between A and B ,

$$\text{then } V - 0.3 = (5 + 5) \times 10^3 \times (0.2 \times 10^{-3}) = 2$$

$$\Rightarrow V = 2.3 \text{ V}$$

(IV) (A) (i) & (iv)

- (i) $V_A - V_B = 7 - 5 = +2 \text{ V}$ Forward Biased
 (ii) $V_A - V_B = 0 - 2 = -2 \text{ V}$ Reverse Biased
 (iii) $V_A - V_B = -10 - 0 = -10 \text{ V}$ Reverse Biased
 (iv) $V_A - V_B = -5 + 12 = +7 \text{ V}$ Forward Biased.

30. (I) 1+1
- (a) Maximum frequency produced by the X-rays = ν
- The energy of the electrons is given by the relation.
- $$E = h\nu$$
- Where,
- $$h = \text{Planck's constant} = 6.626 \times 10^{-34} \text{ Js}$$
- $$\therefore \nu = \frac{E}{h}$$
- $$= \frac{1.6 \times 10^{-19} \times 3 \times 10^4}{6.626 \times 10^{-34}}$$
- $$= 7.24 \times 10^{18} \text{ Hz}$$
- Hence, the maximum frequency of X-rays produced is $7.24 \times 10^{18} \text{ Hz}$.
- (b) The minimum wavelength produced by the X-rays is given as:
- $$\lambda = \frac{c}{\nu}$$
- $$= \frac{3 \times 10^8}{7.24 \times 10^{18}}$$
- $$= 4.14 \times 10^{-11} \text{ m}$$
- $$= 0.0414 \text{ nm}$$
- (II)

	<p>No. of photons emitted per sec,</p> $n = \frac{\text{Power}}{\text{Energy of photon}}$ $= \frac{P}{h\nu} = \frac{10000}{6.6 \times 10^{-34} \times 880 \times 10^3}$ $= 1.72 \times 10^{31}$ <p>(III)</p> <p>From Einstein's relation</p> $eV_s = h\nu - W$ <p>As work function is a constant for a surface.</p> $e(V_{s_2} - V_{s_1}) = h(\nu_2 - \nu_1)$ $V_{s_2} = V_{s_1} + \frac{h}{e}(\nu_2 - \nu_1)$ $= 0.19 + 1240 \left(\frac{1}{190} - \frac{1}{550} \right) = 4.47 \text{ V}$	<p>1</p> <p>1</p>
SECTION E		
<p>31.</p>	<p>(I) (A)</p> <p>(i) The electric field between the plates is</p> $E = \frac{V}{d}$ <p>The distance between plates is doubled, $d = 2d$</p> $\therefore E' = \frac{V'}{d'} = \left(\frac{V}{K} \right) \times \frac{1}{2d} = \frac{1}{2} \left(\frac{E}{K} \right)$ <p>Therefore, if the distance between the plates is double, the electric field will reduce to one half.</p> <p>(ii) As the capacitance of the capacitor</p> $C' = \frac{\epsilon_0 KA}{d'} = \frac{\epsilon_0 KA}{2d} = \frac{1}{2} C$ <p>Energy stored in the capacitor is $U = \frac{Q^2}{2C}$</p> <p>New energy, $U' = \frac{Q^2}{2C'} = \frac{Q^2}{2(1/2)C} = 2 \left(\frac{Q^2}{2C} \right) = 2U$</p> <p>Therefore, when the distance between the plates is doubled, the capacitance reduces to half and the energy stored in the capacitor becomes double.</p> <p>(B)</p>	<p>1</p> <p>2</p>

$$C_1 = \frac{2K\epsilon_0 A \times 3}{d}$$


$$C_2 = \frac{K\epsilon_0 A \times 3}{2d}$$

Now both are in series

$$\frac{1}{C_s} = \frac{1}{C_1} + \frac{1}{C_2} = \frac{d}{6K\epsilon_0 A} + \frac{2d}{3K\epsilon_0 A}$$

$$\frac{1}{C_s} = \frac{d+4d}{6K\epsilon_0 A}$$

$$C_s = \frac{6K\epsilon_0 A}{5d}$$

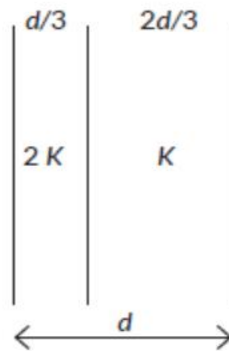

2

OR

(I) (A)

Work done in bringing the charge q_1 from infinity to the position r_1

$$W_1 = q_1 V(r_1)$$


Work done in bringing the charge q_2 to the position r_2

$$W_2 = q_2 V(r_2) + \frac{q_1 q_2}{4\pi\epsilon_0 r_2}$$

Hence, total work done in assembling the two charges

$$W = W_1 + W_2$$

$$W = q_1 V(r_1) + q_2 V(r_2) + \frac{q_1 q_2}{4\pi\epsilon_0 r_2}$$

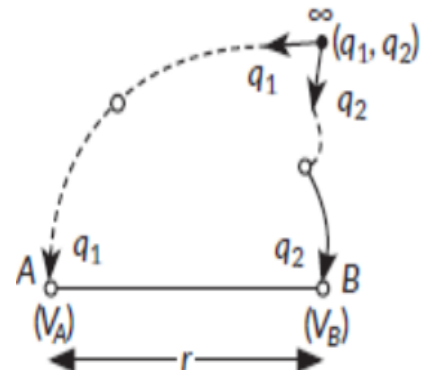

3

(B)

1

1

$$(i) \quad PE = \sum \frac{kq_i q_j}{r_{ij}}$$

Potential energy of the arrangement is given by

$$U = \frac{kQ(-q)}{L} + \frac{kQq}{L} + \frac{k(-q)q}{L}$$


$$\therefore U = -\frac{kq^2}{L}$$

$$(ii) \quad AD = \sqrt{L^2 - \frac{L^2}{4}} = \frac{\sqrt{3}}{2}L$$


Potential at D

$$V = \frac{k(-q) \times 2}{L} + \frac{kq \times 2}{L} + \frac{kQ \times 2}{\sqrt{3}L}$$

$$\therefore V = \frac{2kQ}{\sqrt{3}L}$$



32. (I) (A)

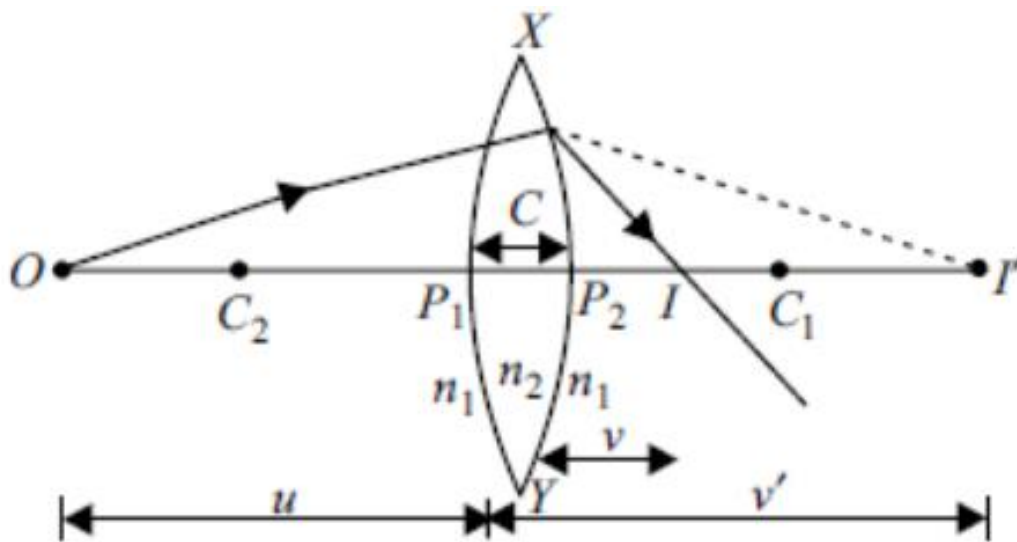

3+2

For refraction at spherical surface XP_1Y , object is at O and image is at I' .

So, object distance is u and image distance is v' . Also, ray of light is travelling from rarer medium (n_1) to denser medium (n_2).

$$\text{So, } \frac{n_2 - n_1}{R_1} = \frac{n_2}{v'} - \frac{n_1}{u} \quad \dots(i)$$

For refraction at spherical surface XP_2Y , point I' behaves as virtual object and image is formed at I . Also, ray of light is travelling from denser medium (n_2) to rarer medium (n_1)

$$\frac{n_2 - n_1}{R_2} = \frac{n_2}{v'} - \frac{n_1}{v} \quad \dots(ii)$$

Subtracting equation (ii) from (i), we get

$$\frac{1}{v} - \frac{1}{u} = \left(\frac{n_2 - n_1}{n_1} \right) \left(\frac{1}{R_1} - \frac{1}{R_2} \right) \quad \dots(iii)$$


When the object is at infinity, light rays incident on lens are parallel and are converged at common point on principal axis known as principal focus F of lens.

So, when $u = -\infty$ then $v = +f$ (focal length)

$$\frac{1}{f} = \left(\frac{n_2 - n_1}{n_1} \right) \left(\frac{1}{R_1} - \frac{1}{R_2} \right)$$

This is the lens maker formula when the lens of glass of refractive index n_2 is placed in any medium of refractive index n_1 .

(B) The final image formed by the combination is coinciding with the object itself. Therefore rays from the object are retracing their path after refraction from the lens and reflection from the mirror. The refracted rays are therefore, falling normally on the mirror. Thus, the image of the convex lens should form at the centre of curvature of the convex mirror.

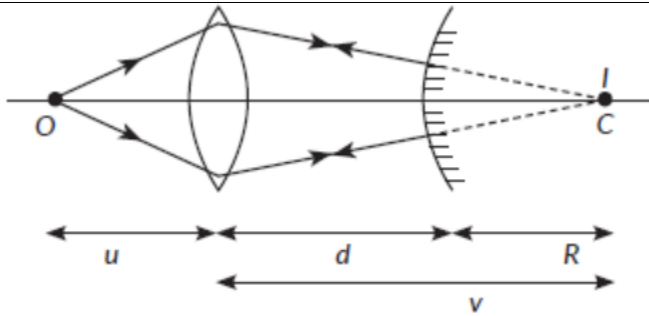

Using lens formula,

$$\frac{1}{v} - \frac{1}{(-12)} = \frac{1}{10} \Rightarrow \frac{1}{v} = \frac{1}{10} - \frac{1}{12} = \frac{1}{60} \Rightarrow v = 60 \text{ cm}$$


Radius of curvature, $R = v - d$

$$\therefore R = 60 - 10 = 50 \text{ cm}$$

$$\therefore \text{Focal length, } f = \frac{R}{2} = 25 \text{ cm}$$

OR

(II) (A)

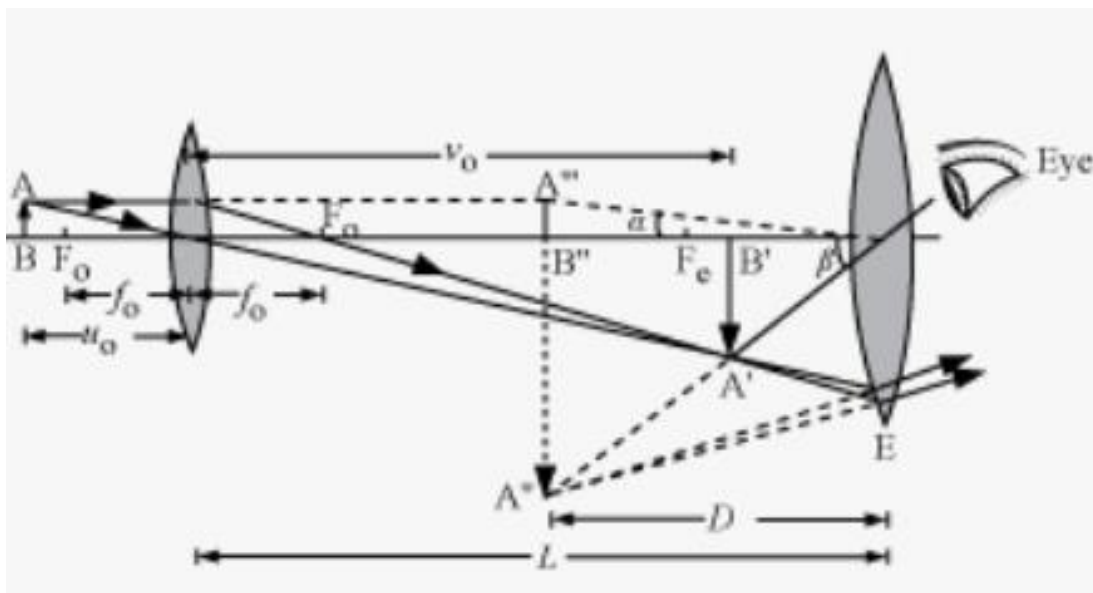

(B) Compound microscope : It consists of two convergent lenses of short focal lengths and apertures arranged co-axially. Lens (of focal length f_o) facing the object is known as objective or field lens while the lens (of focal length f_e) facing the eye, is known as eye-piece or ocular. The objective has a smaller aperture and smaller focal length than eye-piece. Magnifying power of a compound microscope

$$M = m_o \times m_e$$

Total angular magnification, $m = \frac{\beta}{\alpha}$

$\beta \rightarrow$ Angle subtended by the image

$\alpha \rightarrow$ Angle subtended by the object

Since α and β are small,

$\tan \alpha \approx \alpha$ and $\tan \beta \approx \beta$

$$m = \frac{\tan \beta}{\tan \alpha}$$

$$\tan \alpha = \frac{AB}{D}$$

And

$$\tan \beta = \frac{A''B''}{D}$$

$$m = \frac{\tan \beta}{\tan \alpha} = \frac{A''B''}{D} \times \frac{D}{AB} = \frac{A''B''}{AB}$$

On multiplying the numerator and the denominator with $A'B'$, we obtain

$$m = \frac{A''B'' \times A'B'}{A'B' \times AB}$$

Now, magnification produced by objective, $m_0 = \frac{A'B'}{AB}$

Magnification produced by eyepiece, $m_e = \frac{A''B''}{A'B'}$

Therefore,

Total magnification, $(m) = m_0 m_e$

$$m_0 = \frac{V_0}{u_0} = \frac{\text{Image distance for image produced by objective lens}}{\text{Object distance for the objective lens}}$$

$$m_e = \left(1 + \frac{D}{f_e}\right)$$

$f_e \rightarrow$ Focal length of eyepiece

$$m = m_0 m_e$$

$$= \frac{V_0}{u_0} \left(1 + \frac{D}{f_e}\right)$$

(C)

Given: $\mu_0 = -1.5 \text{ cm}$, $f_0 = 1.25 \text{ cm}$

We have,

$$\frac{1}{f_0} = \frac{1}{v_0} - \frac{1}{u_0}$$

$$\frac{1}{1.25} = \frac{1}{v_0} - \frac{1}{-1.5}$$

$$\Rightarrow v_0 = 7.5 \text{ cm}$$

$$m = \frac{v_0}{u_0} \left(1 + \frac{D}{f_e} \right)$$

$$= \frac{7.5}{-1.5} \left(1 + \frac{25}{5} \right)$$

$$\Rightarrow m = -30$$

33. (I) (A), (B)

3+1+1

$$B_A = \frac{\mu_0 I}{2 \times \pi x} \quad (\text{upwards})$$


$$B_B = \frac{\mu_0 I}{2 \times \pi \times (d - x)} \quad (\text{downwards})$$

$$B = B_A - B_B$$

$$= \frac{\mu_0 I}{2 \times \pi} \times \left(\frac{1}{x} - \frac{1}{d - x} \right)$$

$$= \frac{\mu_0 I}{2 \times \pi} \times \frac{d - x - x}{x(d - x)}$$

$$= \frac{\mu_0 I}{2 \times \pi} \cdot \frac{d - 2x}{x(d - x)} \quad (\text{upwards})$$

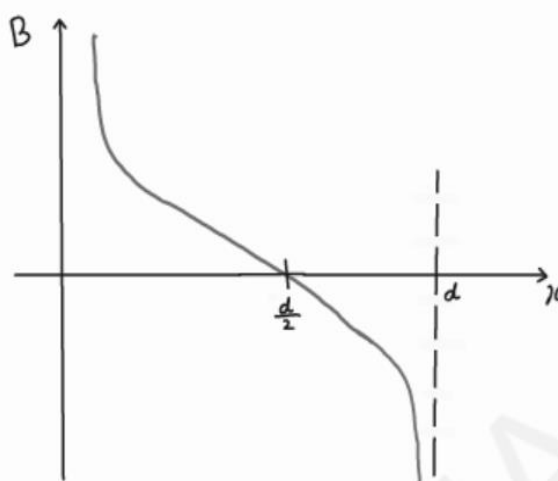


(C)

Thus we define ampere as the current flowing in each conductor separated by a unit distance so that one conductor applies a force of $2 \times 10^{-7} \text{ N}$ on a unit length of another parallel conductor.

OR

(II)

(a) Step-up transformer (or transformer) is based on the principle of mutual induction.

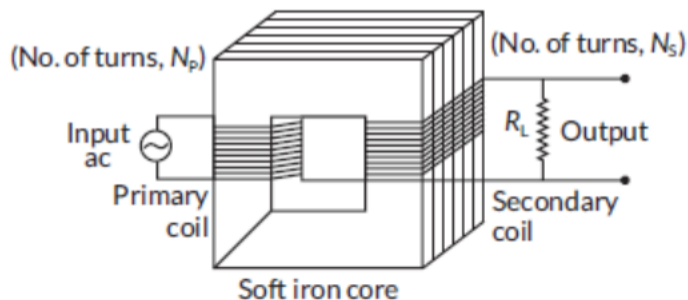

An alternating potential (V_p) when applied to the primary coil induced an emf in it.

$$\epsilon_p = -N_p \frac{d\phi}{dt}$$

If resistance of primary coil is low $V_p = \epsilon_p$.

$$i.e., V_p = -N_p \frac{d\phi}{dt}$$

As same flux is linked with the secondary coil with the help of soft iron core due to mutual induction, emf is induced in it.

$$\epsilon_s = -N_s \frac{d\phi}{dt}$$

If output circuit is open $V_s = \epsilon_s$

$$V_s = -N_s \frac{d\phi}{dt}$$

$$\text{Thus, } \frac{V_s}{V_p} = \frac{N_s}{N_p}$$

For an ideal transformer, $P_{out} = P_{in}$

$$\Rightarrow I_s V_s = I_p V_p$$

$$\therefore \frac{V_s}{V_p} = \frac{I_p}{I_s} = \frac{N_s}{N_p}$$

For step-up transformer, $\frac{N_s}{N_p} > 1$

In case of dc voltage, flux does not change. Thus no emf is induced in the circuit.

(i) The core of the transformer is laminated to reduce eddy current losses.

(ii) Thick copper wire is used in winding of transformers because of its low resistivity *i.e.*, low resistance.

<p>(b) $N_p = 3000, V_p = 2200 \text{ V}, V_s = 220 \text{ V}, N_s = ?$</p> <p>As, $\frac{V_s}{V_p} = \frac{N_s}{N_p}$ or, $N_s = \frac{N_p V_s}{V_p}$</p> <p>$\therefore N_s = \frac{3000 \times 220}{2200} = 300$</p>	2
---	---